



A I	V U	W Pin	Nm T	U/min N	W Pout	% h
1,0	36,0	36	0,44	300	14	39
2,0	36,0	72	1,37	298	43	60
3,0	36,0	108	2,26	295	70	65
4,0	36,0	144	3,24	289	98	68
5,0	36,0	180	4,22	286	126	70
6,0	36,0	216	5,30	283	157	73
7,0	36,0	252	6,43	280	188	75
8,0	36,0	288	7,65	277	222	77
9,0	36,0	324	9,03	273	258	80
10,0	36,0	360	10,30	270	291	81
11,0	36,0	396	11,38	268	319	81
12,0	36,0	432	12,51	264	346	80
13,0	36,0	468	13,64	260	371	79
14,0	36,0	504	14,62	258	395	78
15,0	36,0	540	15,70	254	417	77
16,0	36,0	576	16,73	250	438	76
17,0	36,0	612	18,15	240	456	75
18,0	36,0	648	19,23	235	473	73
19,0	36,0	684	20,40	228	487	71
20,0	36,0	720	21,48	220	495	69

Economy  
 Normallast  
 Spitzenlast  
 Überlast

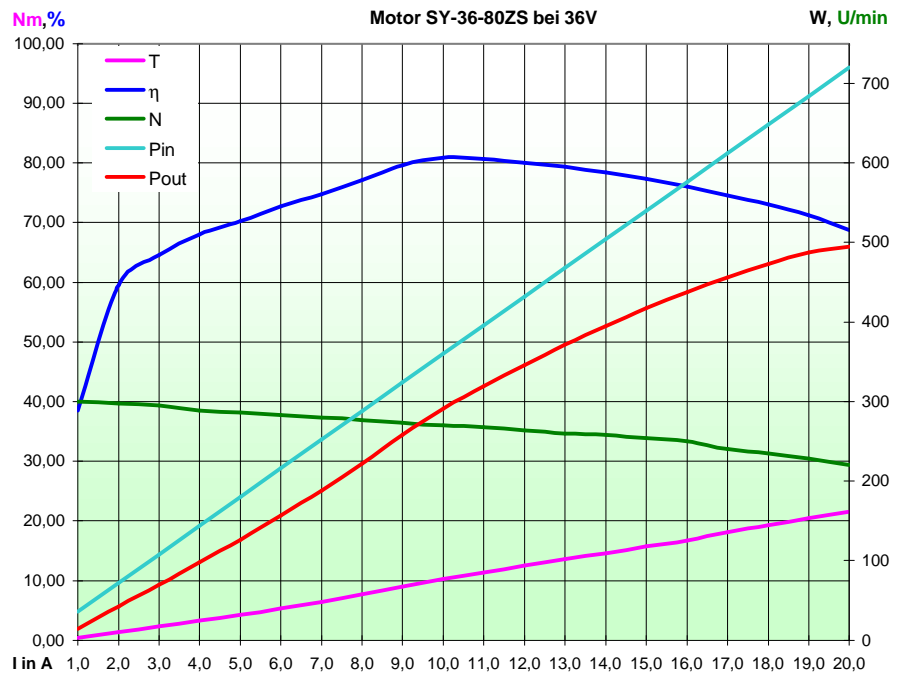


A I	V U	W Pin	Nm T	U/min N	W Pout	% h
1,0	48,0	48	0,52	402	22	46
2,0	48,0	96	1,18	400	49	51
3,0	48,0	144	2,06	394	85	59
4,0	48,0	192	2,99	392	123	64
5,0	48,0	240	4,02	387	163	68
6,0	48,0	288	5,10	385	206	71
7,0	48,0	336	6,38	380	254	76
8,0	48,0	384	7,75	377	306	80
9,0	48,0	432	8,83	375	347	80
10,0	48,0	480	9,91	370	384	80
11,0	48,0	528	10,89	367	418	79
12,0	48,0	576	11,87	364	452	79
13,0	48,0	624	12,85	360	484	78
14,0	48,0	672	13,83	359	520	77
15,0	48,0	720	14,81	355	551	76
16,0	48,0	768	16,38	338	580	76
17,0	48,0	816	17,56	329	605	74
18,0	48,0	864	18,74	314	616	71
19,0	48,0	912	19,42	305	620	68
20,0	48,0	960	20,60	290	626	65

Economy  
 Normallast  
 Spitzenlast  
 Überlast

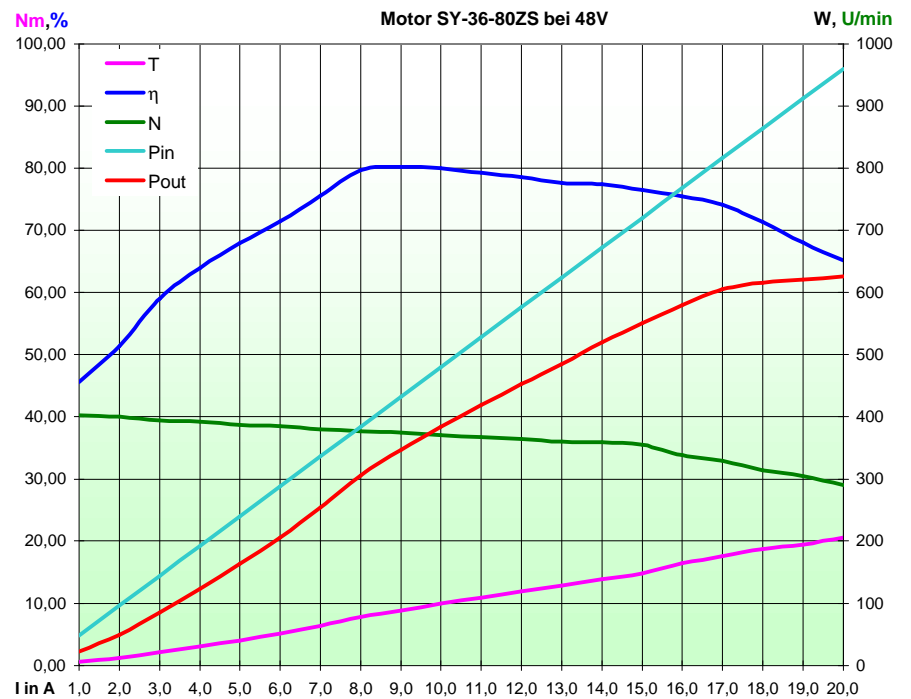

A I	V U	W Pin	Nm T	U/min N	W Pout	% h
2,3	36,0	83	16,73	20	35	42
2,8	36,0	101	16,73	30	53	52
3,3	36,0	119	16,73	40	70	59
3,9	36,0	140	16,73	50	88	62
4,5	36,0	162	16,73	60	105	65
5,1	36,0	184	16,73	70	123	67
5,7	36,0	205	16,73	80	140	68
6,3	36,0	227	16,73	90	158	70
6,9	36,0	248	16,73	100	175	71
7,4	36,0	266	16,73	110	193	72
8,0	36,0	288	16,73	120	210	73
8,5	36,0	306	16,73	130	228	74
9,1	36,0	328	16,73	140	245	75
9,7	36,0	349	16,73	150	263	75
10,4	36,0	374	16,73	160	280	75
11,0	36,0	396	16,73	170	298	75
11,6	36,0	418	16,73	180	315	75
12,2	36,0	439	16,73	190	333	76
12,8	36,0	461	16,73	200	350	76
13,5	36,0	486	16,73	210	368	76
14,2	36,0	509	16,73	220	385	76
14,7	36,0	529	16,73	230	403	76
15,4	36,0	554	16,73	240	420	76
16,0	36,0	576	16,73	250	438	76

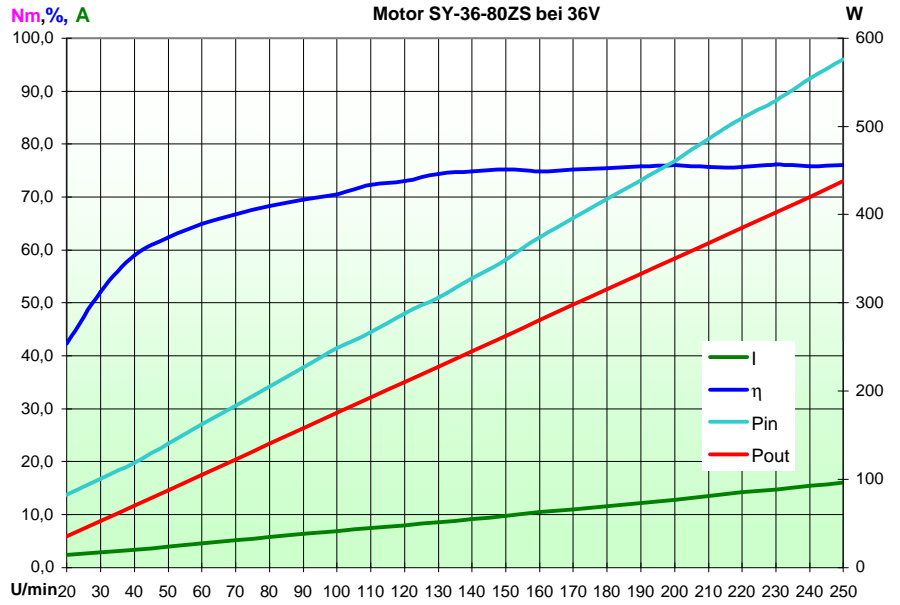

A I	V U	W Pin	Nm T	U/min N	W Pout	% h
1,6	48,0	77	16,73	20	35	46
2,3	48,0	110	16,73	40	70	63
3,2	48,0	151	16,73	60	105	70
4,1	48,0	194	16,73	80	140	72
4,9	48,0	235	16,73	100	175	74
5,7	48,0	274	16,73	120	210	77
6,5	48,0	312	16,73	140	245	79
7,4	48,0	353	16,73	160	280	79
8,3	48,0	398	16,73	180	315	79
9,2	48,0	442	16,73	200	350	79
10,1	48,0	485	16,73	220	385	79
11,0	48,0	526	16,73	240	420	80
11,9	48,0	571	16,73	260	455	80
12,7	48,0	610	16,73	280	490	80
13,6	48,0	653	16,73	300	525	80
14,5	48,0	696	16,73	320	560	81
15,5	48,0	744	16,73	340	596	80
15,8	48,0	758	16,73	350	613	81

